

Rec'd PCT/PTO 14 APR 2005



PCT/EP 03 / 11176

1 531756



INVESTOR IN PEOPLE

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

REC'D 10 NOV 2003

WIPO

PCT

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

[Signature]

Dated 24 July 2003

An Executive Agency of the Department of Trade and Industry

BEST AVAILABLE COPY

Patents 1977
(Rule 13)

The
Patent
Office

2306102 757901-1 002319
0.00-0224627.0

THE PATENT OFFICE

C

23 OCT 2002

NEWPORT

The Patent Office

Cardiff Road

Newport

Gwent NP9 1RH

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference

SC12303EM/DJM/GB/JB/RAUBUCH (o/s)

2. Patent application number

(The Patent Office will fill in this part)

0224627.0

123 OCT 2002

3. Full name, address and postcode of the or of each applicant (underline all surnames)

MOTOROLA, INC
1303 EAST ALGONQUIN ROAD,
SCHAUMBURG, ILLINOIS 60196,
U.S.A.

Patents ADP number (if you know it)

08281107001

If the applicant is a corporate body, give the country/state of its incorporation

U.S.A.

DELAWARE

4. Title of the invention

ARRANGEMENT, SYSTEM AND METHOD FOR VECTOR PERMUTATION
IN SINGLE-INSTRUCTION MULTIPLE-DATA MICROPROCESSORS

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

TRELEVEN COLIN

EUROPEAN INTELLECTUAL PROPERTY DEPARTMENT
MIDPOINT
ALENCON LINK
BASINGSTOKE
HAMPSHIRE RG21 7PL
UK
ADP NO. 00001180006

Patents ADP number (if you know it)

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

☒ YES ☐ NO

a) any applicant named in part 3 is not an inventor, or

b) there is an inventor who is not named as an applicant, or

c) any named applicant is a corporate body.

See note (d))

Patents Form 1/77

9. the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 8

Claim(s) 4

Abstract 1

Drawing(s) 2 + 2 RM

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 2

Request for preliminary examination and search (Patents Form 9/77) 1


Request for substantive examination (Patents Form 10/77) 1

Any other documents 1 x FEE SHEET
(please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature



Date

15/10/02

12. Name and daytime telephone number of person to contact in the United Kingdom

TRELEVEN COLIN

Julia BRAMHALL

01256 790002

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

BEST AVAILABLE COPY

Patents Form 1/77

ARRANGEMENT, SYSTEM AND METHOD FOR VECTOR PERMUTATION IN
SINGLE-INSTRUCTION MULTIPLE-DATA MICROPROCESSORS

5 Field of the Invention

This invention relates to microprocessors with Single-Instruction Multiple-Data (SIMD) capability.

10

Background of the Invention

In the field of this invention microprocessors with SIMD architecture are arranged to process vector operands. It is known to provide instructions that permute (rearrange the order of) the components of vector operands in order to improve the efficiency of digital signal processing algorithms on SIMD microprocessors. Permutation parameters are required to determine the characteristics of the permutation to be performed.

However, this approach has the disadvantage(s) that if the vector permutation requires extra instructions, performance decreases. If the permutation parameters and/or the permuted vector operand require extra registers in the microprocessor's vector register file, a large register file is required. This increases the microprocessor's size and has a negative impact on program code density.

30

A need therefore exists for an arrangement, system and method for vector permutation in SIMD microprocessors wherein the abovementioned disadvantage(s) may be alleviated.

5

Statement of Invention

10 In accordance with a first aspect of the invention there is provided an arrangement for vector permutation in SIMD microprocessors as claimed in claim 1.

In accordance with a first aspect of the invention there is provided a system for vector permutation in SIMD
15 microprocessors as claimed in claim 2.

In accordance with a third aspect of the invention there is provided a method for vector permutation in SIMD microprocessors as claimed in claim 5.

20

The arrangement preferably further includes a negate block coupled to the control means and coupled to receive and selectively negate vectors from the permutation logic block according to the control parameters received from
25 the control means, wherein the control parameters include permutation parameters and negate parameters.

Preferably the control means includes at least one counter arranged to provide a sequential order for
30 selecting one of the plurality of control registers.

The control register parameters are preferably also used for determining negate characteristics and the step of permutating further includes the step of selectively
5 negating the vectors according to the parameters of the selected control register. Preferably the step of selecting further includes the following of a sequential order of the plurality of control registers.

10 Preferably the sequential order includes automatic sequencing through a set of fixed control parameters. Alternatively the sequential order preferably includes automatic sequencing through a set of programmable control parameters. The sequential order is preferably
15 cyclical.

In this way an arrangement, system and method for vector permutation in SIMD microprocessors is provided in which no separate permutation instructions are necessary or
20 need to be executed, and no permutation parameters need be stored in the vector registers. This leads to higher performance, a smaller vector register file and hence a smaller size of the microprocessor and better program code density.

25

Brief Description of the Drawings

One arrangement, system and method for vector permutation
30 in SIMD microprocessors incorporating the present

invention will now be described, by way of example only, with reference to the accompanying drawings, in which:

5 FIG. 1 shows a block schematic diagram of a known microprocessor with SIMD architecture; and

FIG. 2 shows a block schematic diagram of a microprocessor system with SIMD architecture incorporating the present invention.

10

Description of Preferred Embodiment(s)

15 Within the field of SIMD architecture, it is known that permutation and optional negate operations of vector operands may be performed as side operations of certain instructions and do not themselves require separate instructions or execution cycles.

20 However, programmers need control over when and how such permutations are performed. In order to control when permutations are performed, qualifiers are needed. These qualifiers may be:

- enable/disable mechanisms
- 25 - vector register numbers
- instruction types
- other

30 In order to control how permutations are performed, permutation parameters, source/destination operands or optional negate operations are needed. Such permutation

- 5 -

parameters can either be fixed (hard-wired for specific algorithms) or programmable (stored in registers).

Referring now to FIG. 1, there is shown a prior art
5 microprocessor 5 with SIMD architecture. A vector
register file 10 of the microprocessor feeds vector
operands into a permutation logic block 20. The vector
register file 10 has a predetermined number of registers.
The number of general purpose and/or vector registers in
10 modern Reduced Instruction Set Chip (RISC) machines
typically is an integer to the power of 2 with 8/16/32/64
being the most common numbers. In the example depicted in
FIG. 1, there are 32 128-bit registers, each register
having four 32-bit elements. The last register (register
15 15) is used to store control parameters for controlling
the permutation logic block 20, as depicted by arrow 17.

Referring now to FIG. 2, there is shown a microprocessor
100 with SIMD architecture. A read port of a vector
20 register file 110 feeds vector operands into a
permutation logic block 120 and from there into a negate
logic block 130. The vector register file 110 has a
predetermined number of registers. In the example
depicted in FIG. 2, there are 8 128-bit registers (of
25 which 5 are shown), each register having four 32-bit
elements.

The output is typically used as source operand for a
vector Arithmetic Logic Unit (ALU) (not shown).

Permutation and negate parameters relating to permutations to be performed upon the vectors of the vector register file 110 are stored as control parameters in a series of control registers 140. A control block 145 is coupled to each of the series of control registers 140 and is further coupled to provide the control parameters therefrom to control the permutation logic block 120 and the optional negate logic block 130. A counter 150 is also coupled to the control block 145, the counter 150 being arranged to determine which of the series of control registers is coupled via the control block 145 to the permutation logic block 120 and the optional negate logic block 130 at any one time.

In operation, the microprocessor 100 will commence with the counter 150 pointing at a given control register of the series 140, such as a first control register 141. When a permutation is to be performed (all qualifiers true), the control parameters (permutation and negate parameters) stored in the first control register 141 are provided via the control block 145 to the permutation logic block 120 and to the optional negate logic block 130. The contents of the vector register file 110 are then processed by the permutation logic block 120 and the optional negate logic block 130 according to these control parameters. It will be noted that the optional negate logic block 130, being optional, may or may not perform a negate function on the contents of the vector register file 110, depending upon the received control parameters.

- 7 -

Once processed, the output vector source operand is sent to the ALU (not shown) and the counter 150 is incremented. This causes the control block 145 to select the next control register of the series 140 (such as the
5 second control register 142) for the next permutation. The counter 150 is arranged to cycle through each of the series of control registers 140 in a repeating manner.

It will be understood that the an arrangement, system and
10 method for vector permutation in SIMD microprocessors described above provides the following advantages:
No extra instructions are required to permute/negate the components of vector operands, leading to higher performance. Furthermore, no further registers of the
15 vector register file are required to store the permuted/negated vector operands and the permutation parameters. It should be noted that even with programmable permutation parameters, the control registers 140 of FIG. 2 are significantly smaller than
20 the vector register 15 of FIG. 1. Since the microprocessor's register file is smaller, this leads to a smaller size of the microprocessor and better program code density (fewer bits in op-codes for vector register addressing).

25

It will be appreciated by a person skilled in the art that alternative embodiments to that described above are possible. For example, the control register series 140 and counter 150 may be augmented by multiple counters and
30 control register series, coupled with qualifiers such as instruction type or register number. Also the counting

sequence need not repeat in a cyclical fashion, and it is possible to load the counter(s) with specific sequence start points by adding just one further instruction. All of these features may be used to add complexity to the
5 sequence of permutations and so further increase the flexibility of the architecture.

Furthermore the number and size of vector registers may differ from those described above, it being understood
10 that the number of vector registers required by the present invention will be less than that required for an equivalent prior art arrangement.

Claims

1. An arrangement for vector permutation in a single-instruction multiple-data microprocessor, the arrangement
5 comprising:
a permutation logic block coupled to receive and
permute vectors from at least one vector register
according to control parameters;
a plurality of control registers, each coupled to
10 selectively provide control parameters to the permutation
logic block; and,
control means coupled between the plurality of control
registers and the permutation logic block and arranged
for selecting one of the plurality of control registers
15 and for providing the control parameters from the
selected one of the plurality of control registers to the
permutation logic block.
2. A single-instruction multiple-data microprocessor
20 vector permutation system comprising:
at least one vector register;
a permutation logic block coupled to receive and
permute vectors from the at least one vector register
according to control parameters;
25 a plurality of control registers, each coupled to
selectively provide control parameters to the permutation
logic block; and,
control means coupled between the plurality of control
registers and the permutation logic block and arranged
30 for selecting one of the plurality of control registers
and for providing the control parameters from the

selected one of the plurality of control registers to the permutation logic block.

3. The arrangement of claim 1 or system of claim 2
5 further comprising a negate block coupled to the control means and coupled to receive and selectively negate vectors from the permutation logic block according to the control parameters received from the control means, wherein the control parameters include permutation
10 parameters and negate parameters.

4. The arrangement or system of any preceding claim wherein the control means includes at least one counter arranged to provide a sequential order for selecting one
15 of the plurality of control registers.

5. A method for vector permutation in a single-instruction multiple-data microprocessor, the method comprising the steps of:
20 providing vectors to be permuted;
selecting one of a plurality of control registers, each control register containing parameters for determining permutation characteristics;
permutating the vectors according to the parameters of
25 the selected control register.

6. The method of claim 5 wherein the control register parameters are also used for determining negate characteristics and the step of permutating further
30 includes the step of selectively negating the vectors

- 11 -

according to the parameters of the selected control register.

7. The method of claim 5 or claim 6 wherein the step of
5 selecting further includes the following of a sequential
order of the plurality of control registers.

8. The arrangement or system of claim 4, or method of
claim 7, wherein the sequential order includes automatic
10 sequencing through a set of fixed control parameters.

9. The arrangement or system of claim 4, or method of
claim 7, wherein the sequential order includes automatic
sequencing through a set of programmable control
15 parameters.

10. The arrangement, system or method of claims 4, 7, 8
or 9 wherein the sequential order is cyclical.

20 11. An arrangement for vector permutation in single-
instruction multiple-data microprocessors substantially
as hereinbefore described with reference to FIG. 2 of the
accompanying drawings.

25 12. A system for vector permutation in single-
instruction multiple-data microprocessors substantially
as hereinbefore described with reference to FIG. 2 of the
accompanying drawings.

30 13. A method for vector permutation in single-
instruction multiple-data microprocessors substantially

as hereinbefore described with reference to FIG. 2 of the accompanying drawings.

Abstract


ARRANGEMENT, SYSTEM AND METHOD FOR VECTOR PERMUTATION IN
SINGLE-INSTRUCTION MULTIPLE-DATA MICROPROCESSORS

5

(with reference to FIG. 2)

A vector permutation system (100) for a single-
instruction multiple-data microprocessor has a set of
10 vector registers (110) which feed vectors to permutation
logic (120) and then to a negate block (130) where they
are permuted and selectively negated according to control
parameters received from a selected one of a set of
control registers (140). A control arrangement (145, 150)
15 selects which control register is to provide the control
parameters. In this way no separate permutation
instructions are necessary or need to be executed, and no
permutation parameters need be stored in the vector
registers (110). This leads to higher performance, a
20 smaller vector register file and hence a smaller size of
the microprocessor and better program code density.

FIG. 1
Prior Art

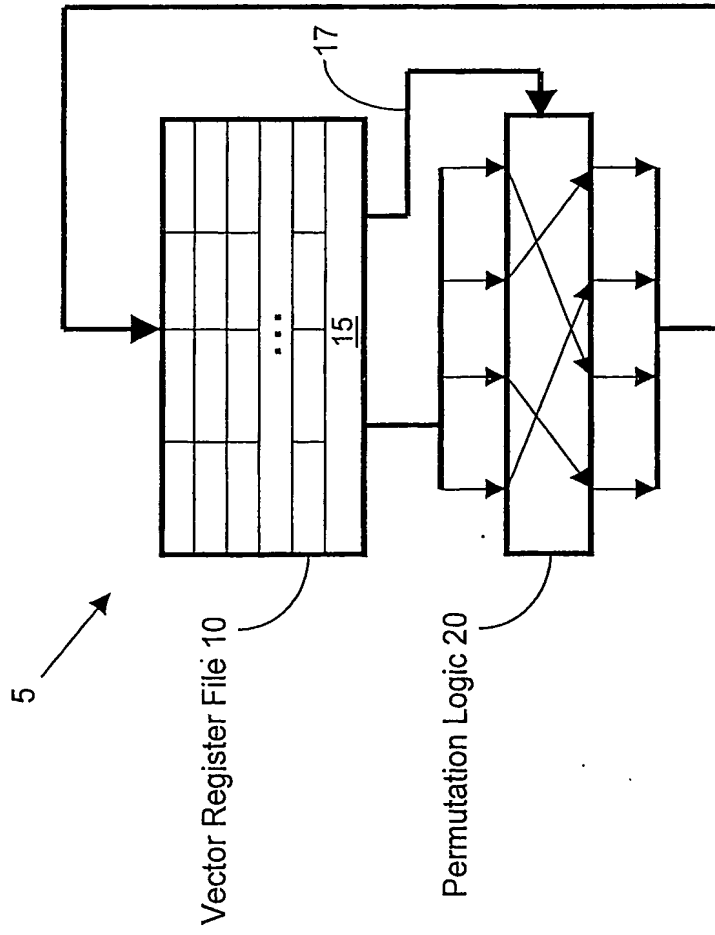

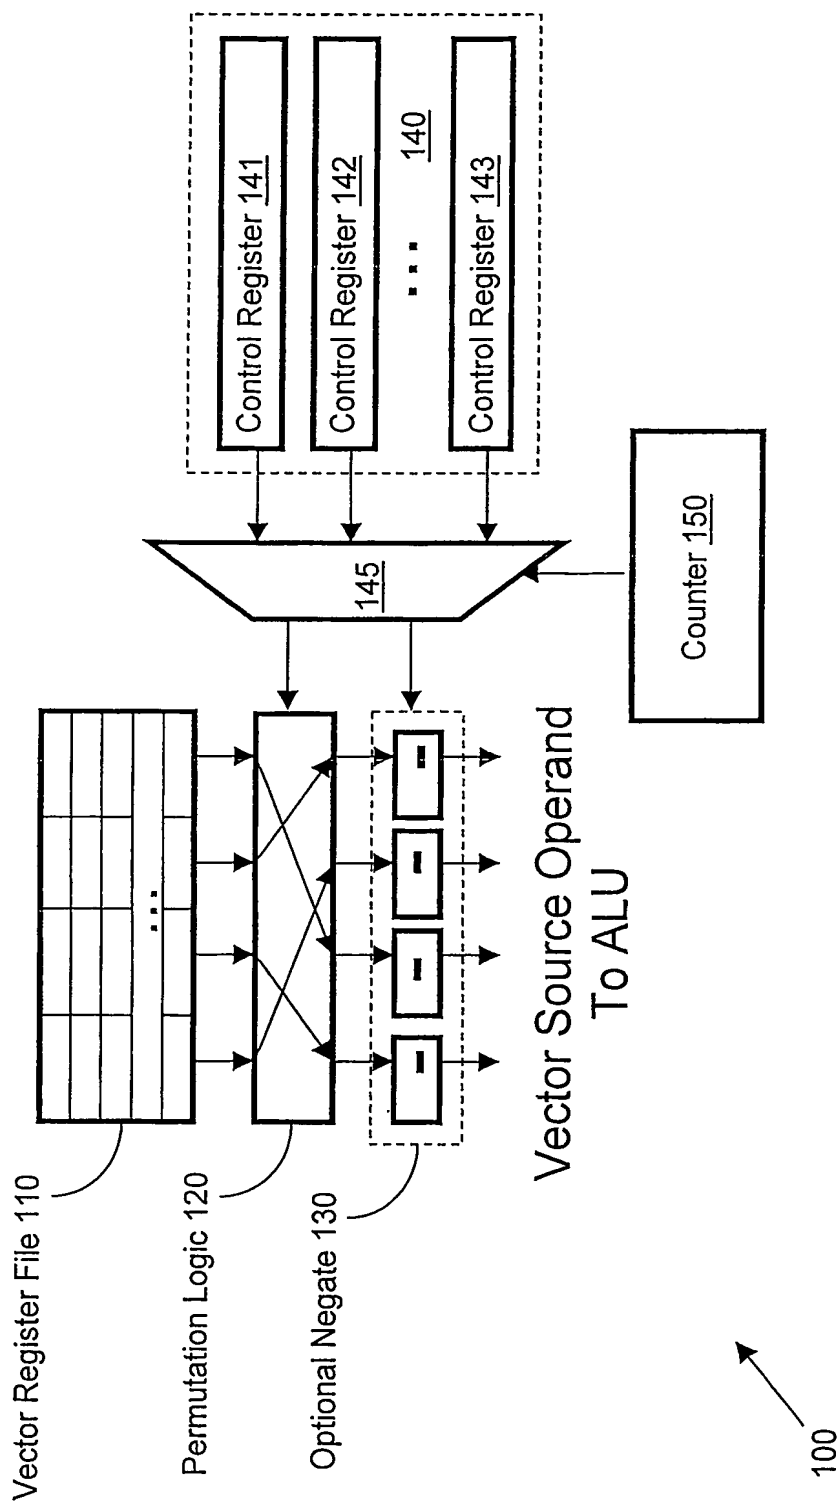


FIG. 2